

# Speakers

## Speaker Systems

### PAB-120WP/SW

Order No. 0253750



#### Weatherproof high-performance PA speaker system, 120 W

- 2-way bass-reflex system in an ABS cabinet
- 100 V line technique
- 30 cm (12") PA bass speaker with impregnated paper cone
- 25 mm (1") horn tweeter system
- Front grille with water-repellent gauze
- Metal parts made of stainless steel
- 4 x M10 threaded insert each at the top and bottom for suspended installation
- Stand sleeve
- Ball-proof according to DIN 18032, Part 3

Model	PAB-120WP/SW
Power rating (RMS)	120/60/30 W
Frequency range	42-20,000 Hz
Number of speakers	2
Sensitivity	98 dB/W/m
Colour	black
Protection class	IP45
Admiss. ambient temp.	-20 °C to +40 °C
Dimensions	370 x 655 x 410 mm
Weight	22.14 kg



### EUL-75/WS

Order No. 0162500



#### PA speaker system

- 100 V line technique
- 6-step power selector switch
- Hi-fi full range speaker
- Excellent sound quality
- White grained wooden cabinet with metal front grille
- Floorstanding speaker with wall holder

Model	EUL-75/WS
Power rating (RMS)	10/5/2.5/1.25/0.625 W
Frequency range	70-18,000 Hz
Sensitivity	86 dB/W/m
Dimensions	180 x 290 x 170 mm
Weight	3.7 kg



### EUL-42/WS

Order No. 0161970



#### Pair of universal PA speaker systems

- 100 V line technique, 2-way version
- White plastic cabinet with metal front grille
- Integrated suspension device for wall mounting
- Pivoting mounting bracket

Model	EUL-42/WS
Power rating (RMS)	10/5/2.5 W
Frequency range	80-18,000 Hz
Sensitivity	87 dB/W/m
Dimensions	95 x 150 x 82 mm
Weight	960 g



### EUL-10

Order No. 0160330



### EUL-10/WS


Order No. 0160850



#### Universal PA speaker systems

- 100 V line technique, 2-way version
- Excellent sound quality
- 5-step power selector switch
- Diecast metal cabinet with black (EUL-10) or white (EUL-10/WS) textured coating and protective metal grille

Model	EUL-10, EUL-10/WS
Power rating (RMS)	10/5/2.5/1.25 W
Frequency range	60-18,000 Hz
Dimensions	118 x 220 x 115 mm
Weight	1.85 kg

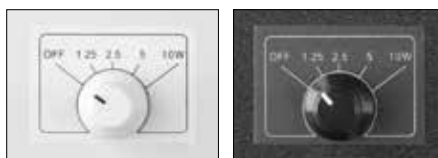

### ESP-315/SW

Order No. 0162860



### ESP-315/WS

Order No. 0162870



#### 2-way PA wall-mount speaker systems

- 100 V PA speaker system with an excellent sound
- 2-way system with 10 x 15 cm bass-midrange speaker and 13 mm dome tweeter
- Power taps: 15/10/5/2.5 W
- Power selector switch with 8 Ω operating position
- Can be mounted horizontally or vertically
- Direction of sound radiation can individually be aligned

Model	ESP-315/SW	ESP-315/WS
Total power rating	30 W	30 W
Power rating (RMS)	15/10/5/2.5 W (100 V) 15 W (8 Ω)	15/10/5/2.5 W (100 V) 15 W (8 Ω)
Impedance	8 Ω	8 Ω
Frequency range	75-20,000 Hz	75-20,000 Hz
Sensitivity	90 dB/W/m	90 dB/W/m
Dimensions	Ø 133 mm x 280 mm	Ø 133 mm x 280 mm
Weight	2.1 kg	2.1 kg

