


### STA-1500A

Order No. 0259120



**Stereo PA amplifier**, with integrated limiter.

- 3 operating modes can be selected (stereo, parallel or bridged)
- Limiter function can be activated as required
- Temperature-controlled fan
- 2 level controls
- Ground lift function
- Speaker switch-on delay
- Protective circuit with LED indication for protection against short circuit, overheating and DC voltage overlay at the outputs
- Each channel with LEDs for indicating operating voltage, signal and limiter
- NEUTRIK SPEAKON connections

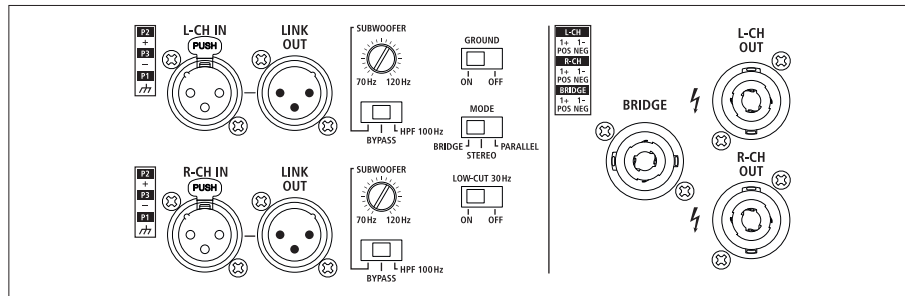

Model	STA-1500A
Peak output power	2,100 W
Power rating at 4 Ω	2 x 700 W
Power rating at 8 Ω	2 x 550 W
Power rating with 8 Ω bridged operation	1 x 1,500 W
Inputs	1 V/10 kΩ
Frequency range	20-20,000 Hz
S/N ratio	77 dB
Crosstalk attenuation	> 60 dB
THD	< 0.1%
Power supply	~ 230 V/50 Hz/2,725 VA
Dimensions	482 x 88 x 430 mm, 2 RS
Weight	15.5 kg


### STA-900A

Order No. 0259110



**Stereo PA amplifier**, with integrated limiter.

- 3 operating modes can be selected (stereo, parallel or bridged)
- Limiter function can be activated as required
- Temperature-controlled fan
- 2 level controls
- Ground lift function
- Speaker switch-on delay
- Protective circuit with LED indication for protection against short circuit, overheating and DC voltage overlay at the outputs
- Each channel with LEDs for indicating operating voltage, signal and limiter
- NEUTRIK SPEAKON connections

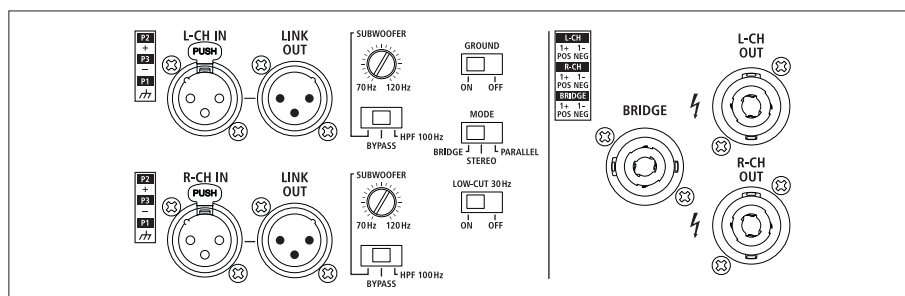

Model	STA-900A
Peak output power	1,300 W
Power rating at 4 Ω	2 x 450 W
Power rating at 8 Ω	2 x 330 W
Power rating with 8 Ω bridged operation	1 x 900 W
Inputs	1 V/10 kΩ
Frequency range	20-20,000 Hz
S/N ratio	84 dB
Crosstalk attenuation	> 60 dB
THD	< 0.1%
Power supply	~ 230 V/50 Hz/1,850 VA
Dimensions	482 x 88 x 430 mm, 2 RS
Weight	13 kg